




1. Скачайте и установите программу EyeBeam.
2. Запустите программу
3. Щелкните правой кнопкой мыши на дисплее телефона и выберите *Options*

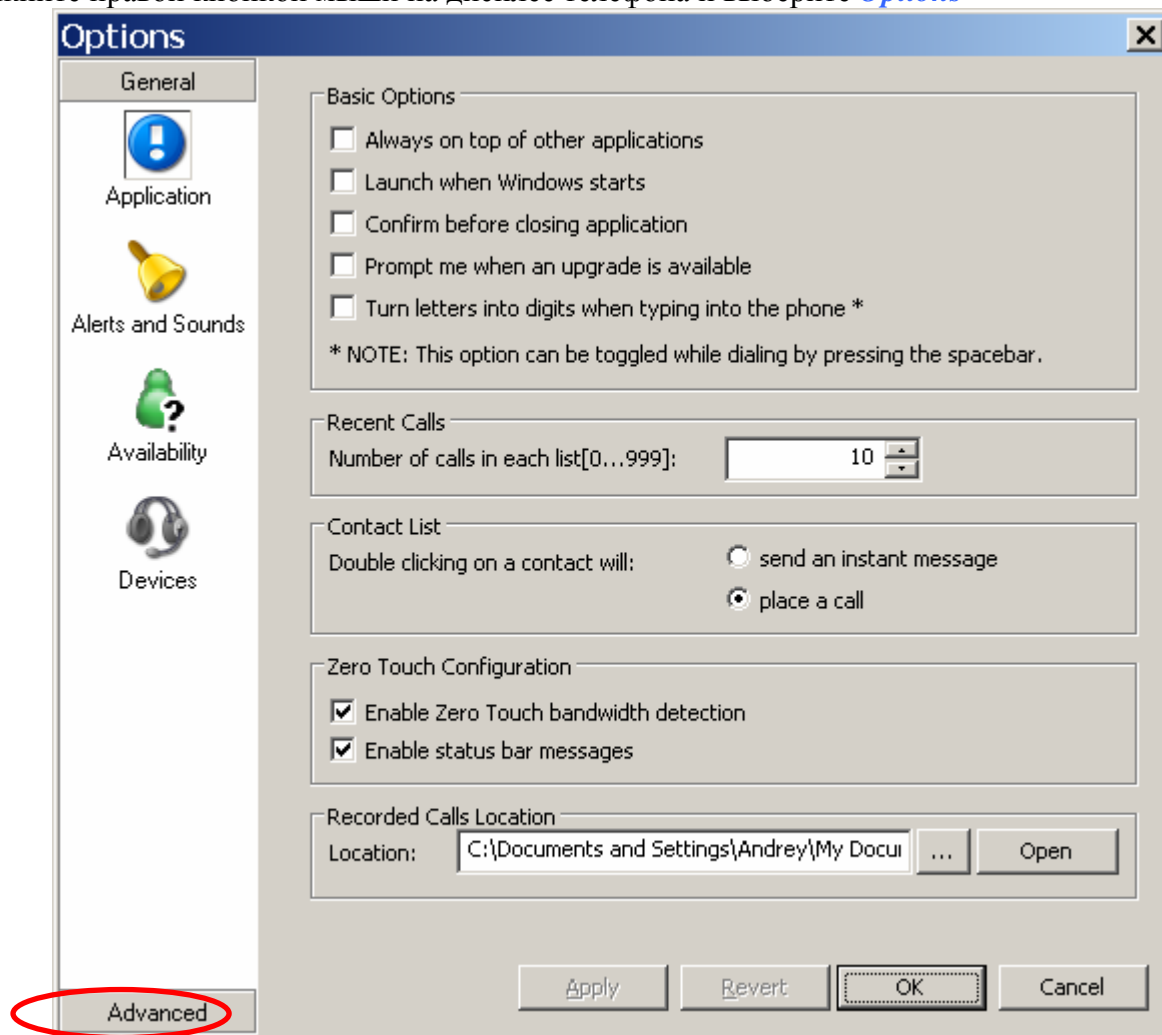

4. Щелкните *Advanced* (выделено красным на рисунке сверху), и, используя кнопки -> и <- заполните список *Enabled Codecs* как показано на рисунке внизу. Затем нажмите *OK*.

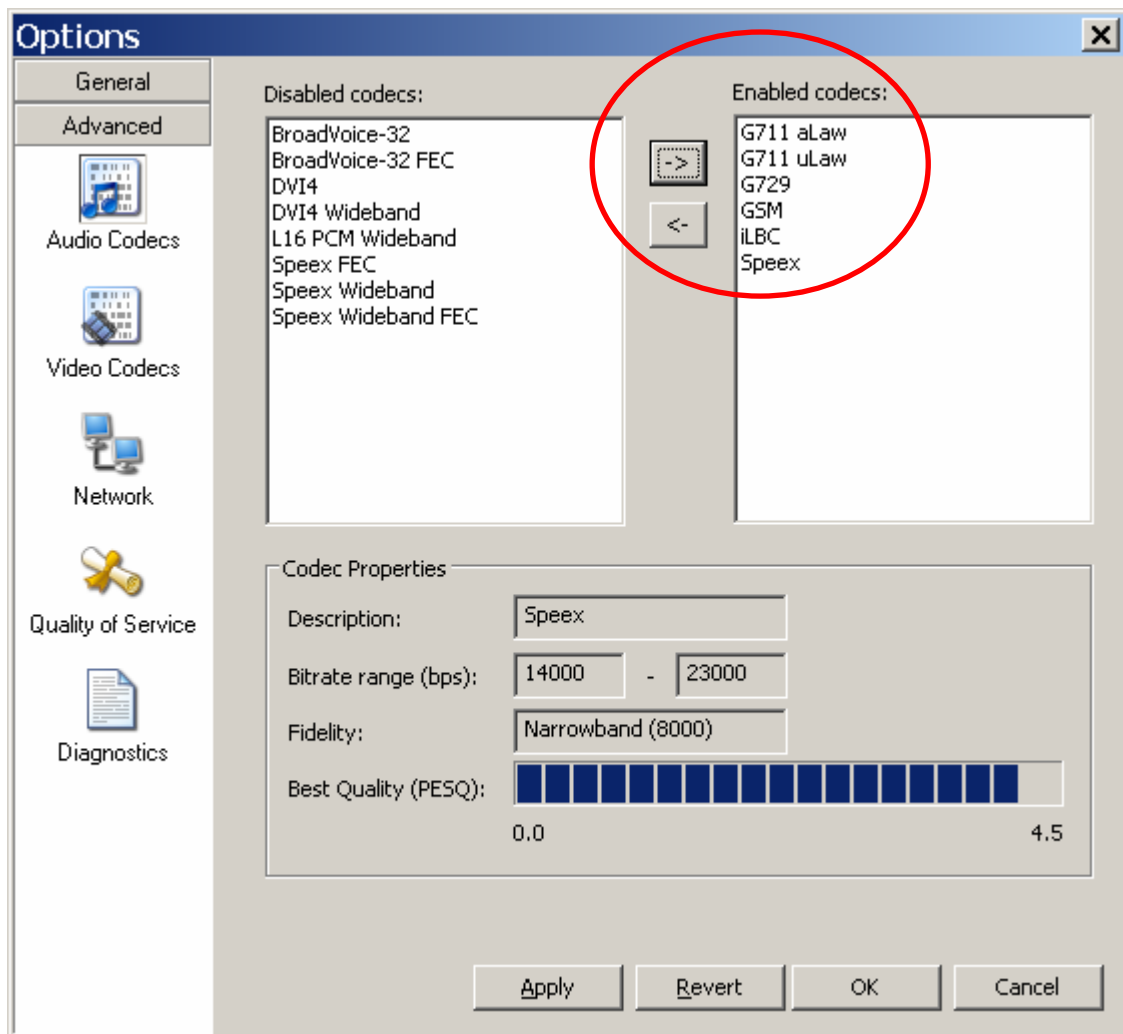

5. Щелкните правую кнопку мыши на дисплее телефона, выберите *SIP Account Settings* и нажмите кнопку *Add*

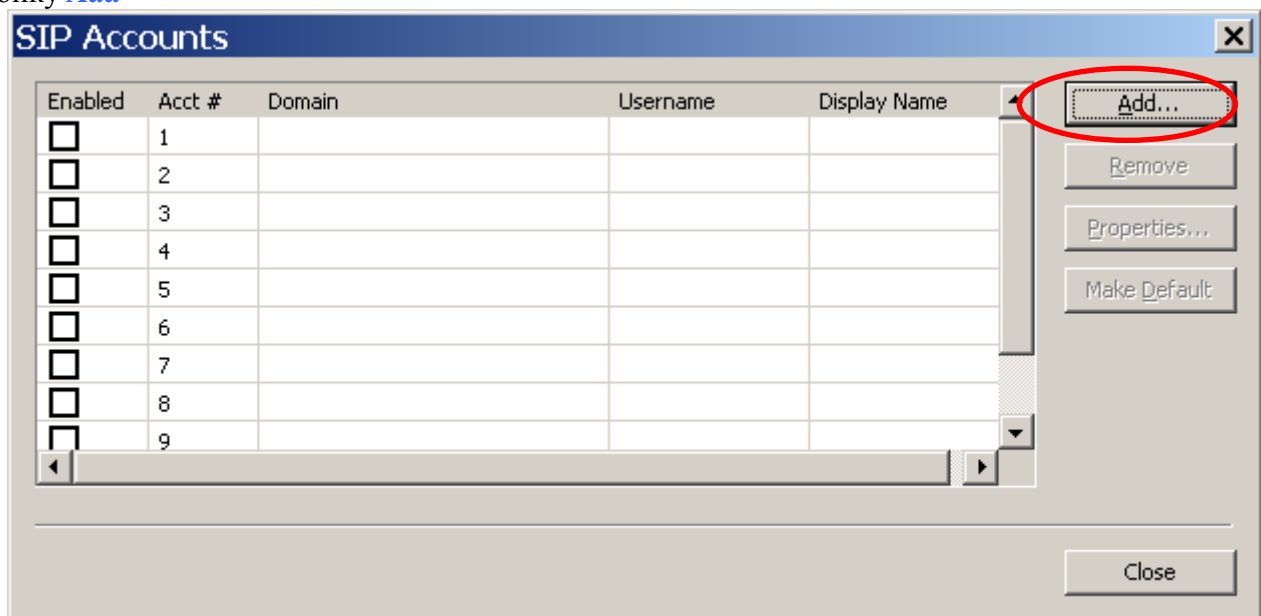

6. Заполните поля: *Display name, User name, Password, Authorization user* вашими данными из письма. В поле *Domain* введите **sip.cartel.md**

Properties of Account 1 [X]

Account | **Voicemail** | Topology | Presence | Storage | Security | Advanced

User Details

Display Name: Andrey

User name: 808124

Password: ●●●●●●

Authorization user name: 808124

Domain: sip.cartel.md

Domain Proxy

Register with domain and receive incoming calls

Send outbound via:

domain

proxy Address: _____

Dialing plan: #1\a\a.T;match=1;prestrip=2;

OK Cancel Apply

7. Выберите закладку *Voicemail*, укажите *Number to dial for checking voicemail* - **sip:111@sip.cartel.md**

Properties of Account 1 [X]

Account | **Voicemail** | Topology | Presence | Storage | Security | Advanced

Check for voice mail

Number to dial for checking voicemail: sip:111@sip.cartel.md

Number for sending calls to voicemail: _____

Send calls to voicemail if unanswered for 0 seconds

Forwarding

Always forward to this address: _____

Forward to this address when busy: _____

OK Cancel Apply


8. Выберите закладку *Topology*, переключите на *Use local IP address*, снимите галочку *Enable ICE*, включите *Manually specify range* и введите **5080-5090**

The image shows a screenshot of the 'Properties of Account 1' dialog box, specifically the 'Topology' tab. The dialog has a title bar with a close button (X) and a tabbed interface with the following tabs: Account, Voicemail, Topology (selected), Presence, Storage, Security, and Advanced. The 'Topology' tab contains the following settings:


- Firewall Traversal**
 - IP address
 - Discover global address
 - Use local IP address
 - STUN server
 - Discover server
 - Use specified server:
 - Enable ICE
- Port used on local computer**
 - Manually specify range: -
- XTunnels**
 - Use XTunnels: (dropdown menu)
 - Server address:
 - Use SIP user name and password
 - Username:
 - Password:

At the bottom of the dialog are three buttons: OK, Cancel, and Apply.

9. Выберите закладку *Presence* и заполните поля согласно рисунку ниже

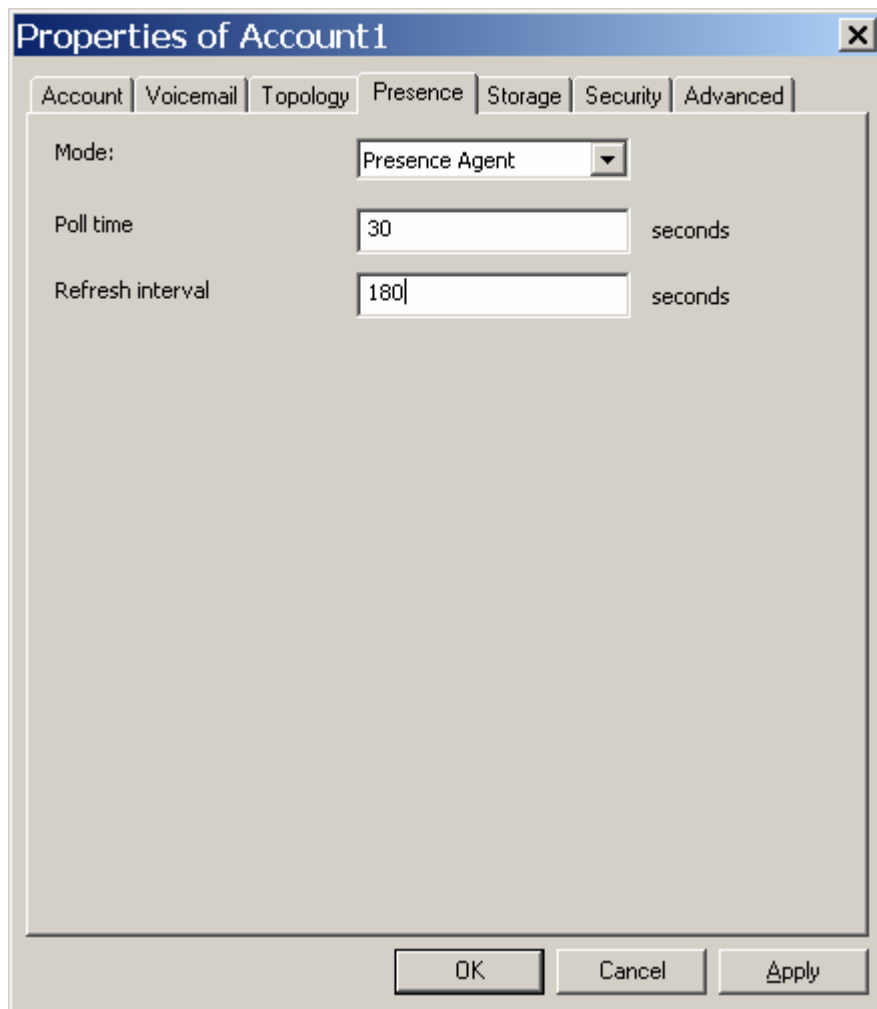

10. Выберите закладку *Security* и установите в *Signalling transport* **UDP**

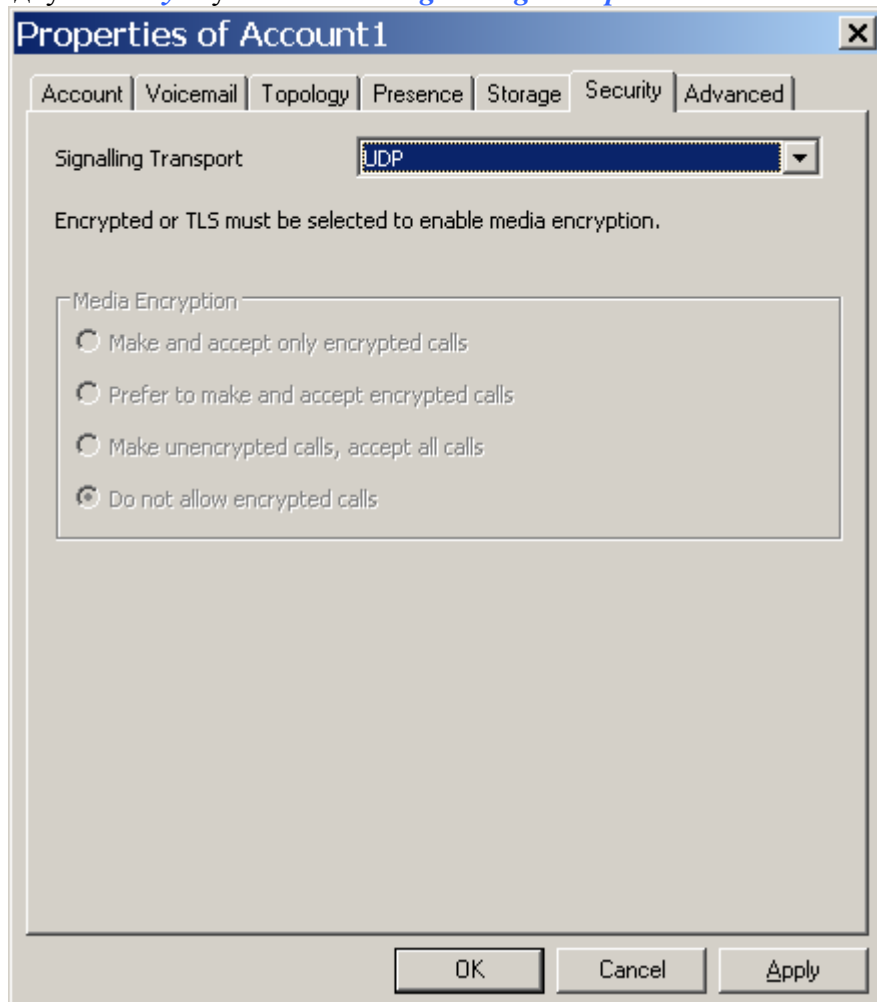

11. Выберите закладку *Advanced* и установите *Register every 180* сек, затем нажмите *OK*

Properties of Account 1

Account Voicemail Topology Presence Storage Security **Advanced**

Register Settings

Reregister every 180 seconds

Min. time 20 seconds

Max. time 180 seconds

Advanced Options

Send SIP keep-alives Use rport

Enable session timers Default session time 60 seconds


Session Timer Preference None

OK Cancel Apply


12. Наберите на клавиатуре телефона *****7469** и нажмите клавишу Enter




Вы увидите следующее окно:

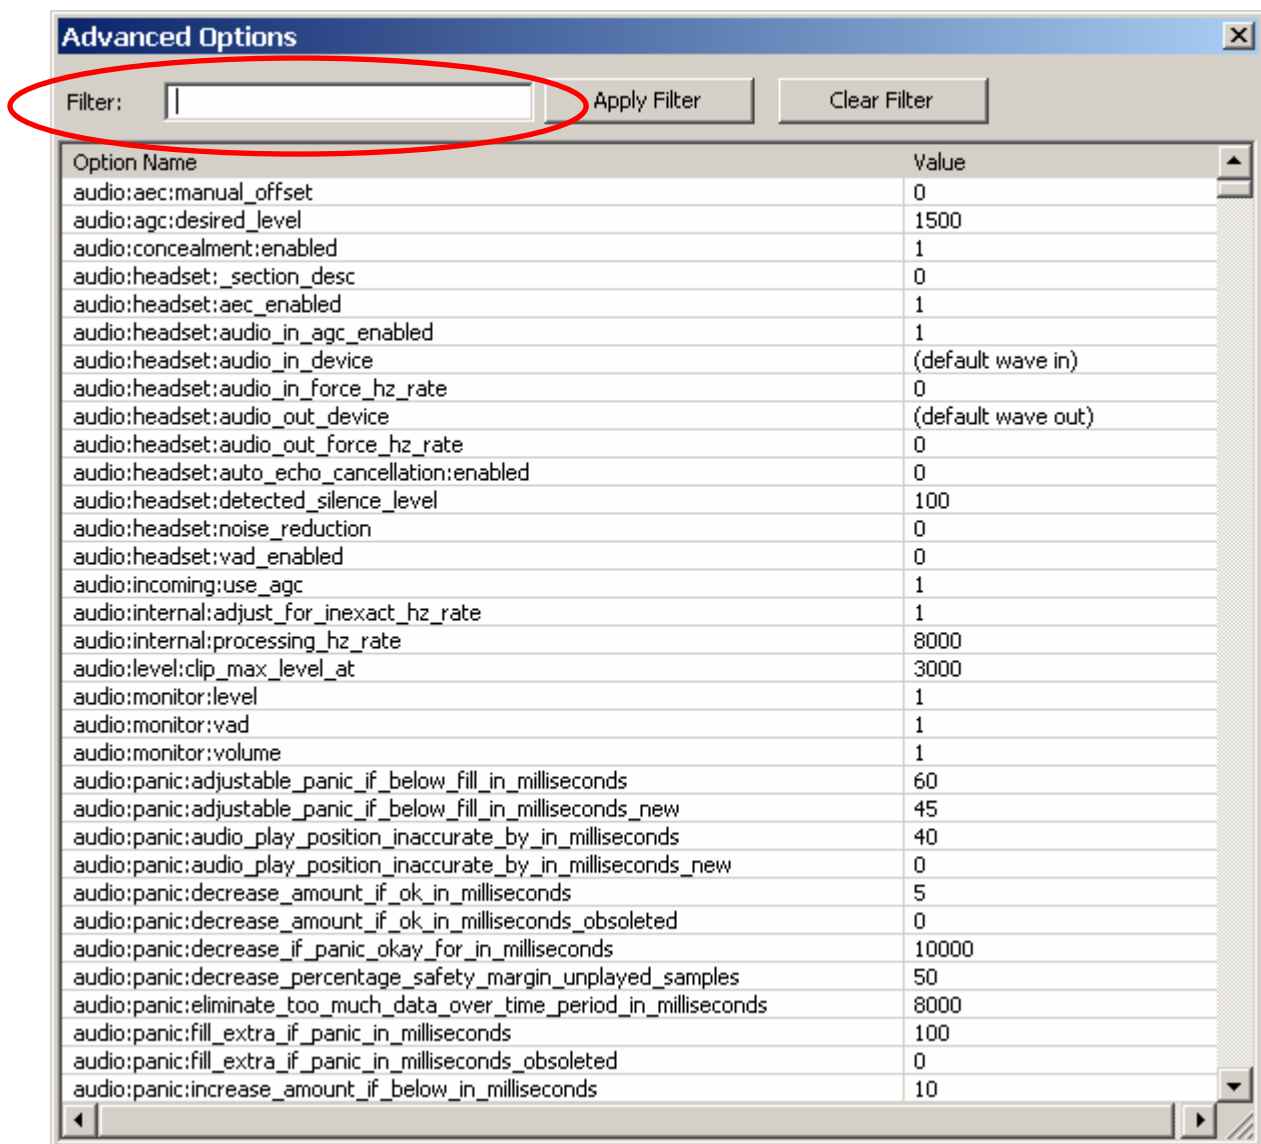

13. Наберите в поле *Filter* (выделено красным на рисунке выше) **honor** и нажмите Enter, дважды щелкните в сетке и поменяйте значение с **1** на **0** и нажмите *OK*

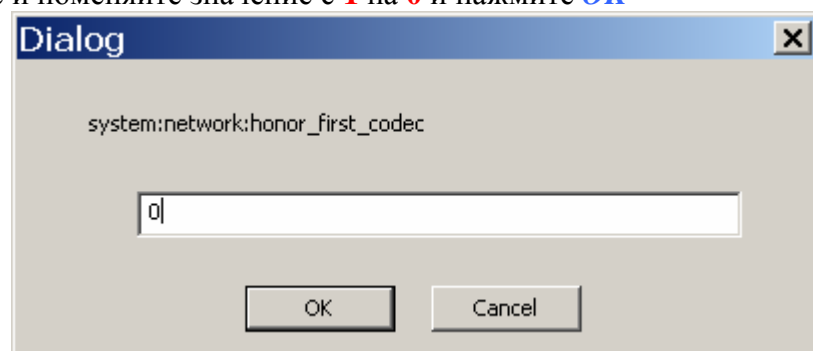

Результат:

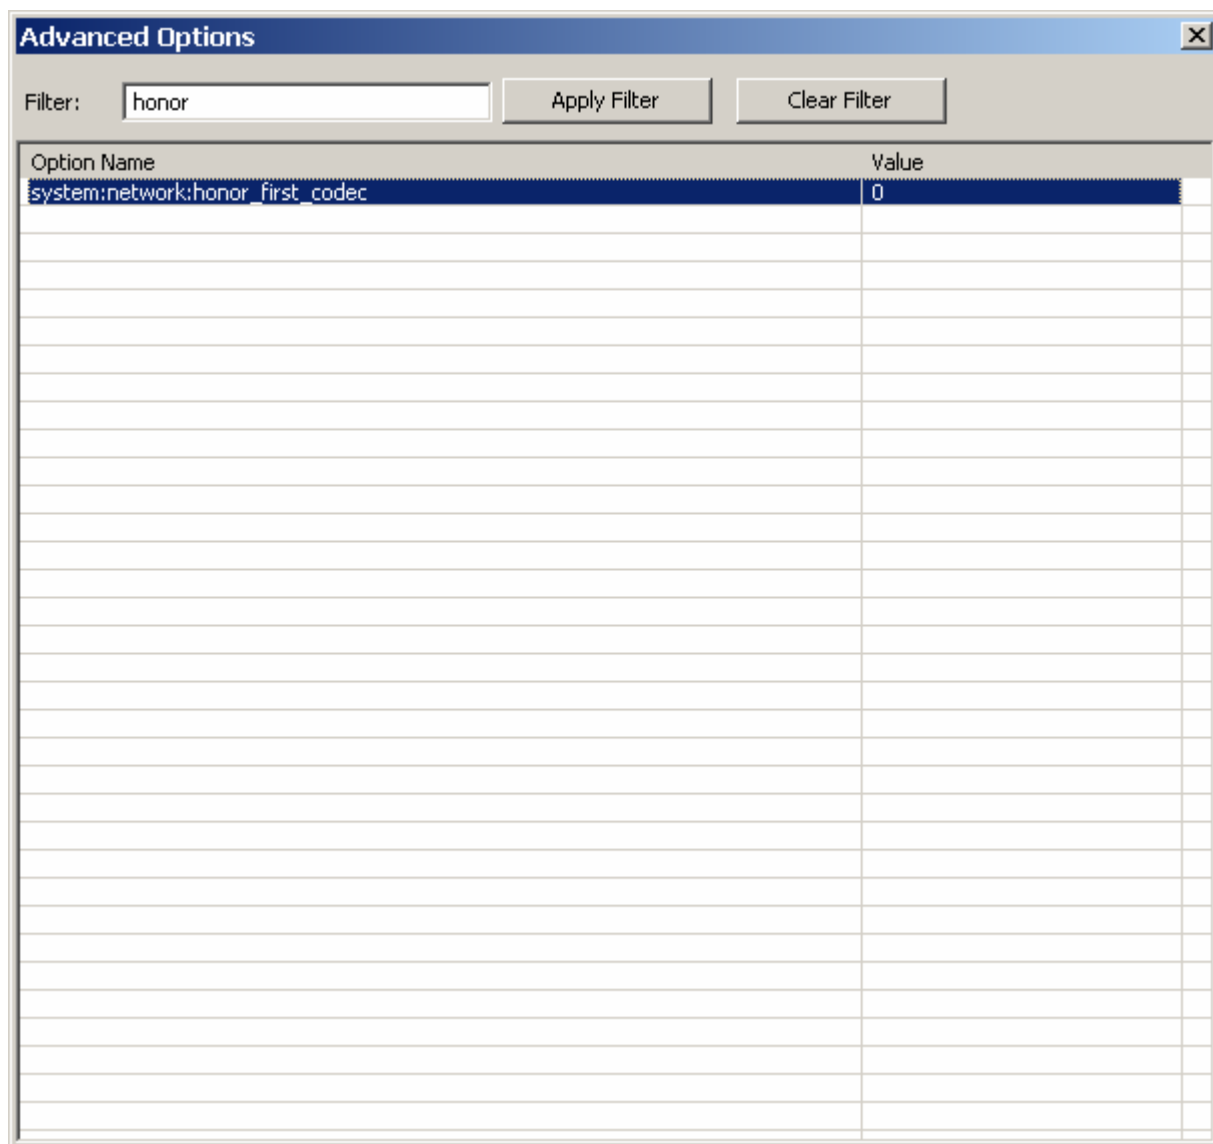


14. Наберите в поле **Filter priority** и нажмите Enter, дважды щелкните мышью в сетке и поменяйте значения для перечисленных ниже кодеков на указанные:

```
codecs:g729:priority    = 1  
codecs:gsm:priority    = 2  
codecs:ilbc:priority   = 3  
codecs:g726-24:priority = 4  
codecs:g711a:priority  = 10  
codecs:g711u:priority  = 11
```


Результат:

Option Name	Value
codecs:broadvoice32:priority	1.000000
codecs:broadvoice32_fec:priority	1.000000
codecs:dvi4:priority	15.000000
codecs:dvi4_wb:priority	5.000000
codecs:evrc:priority	16.0
codecs:g711a:priority	10
codecs:g711u:priority	11
codecs:g722:priority	5.0
codecs:g722_2_wb:priority	3.0
codecs:g723:priority	14.0
codecs:g726-24:priority	4
codecs:g726-32:priority	17.0
codecs:g729:priority	1
codecs:gsm:priority	2
codecs:h263:priority	12.000000
codecs:h263_1998:priority	11.000000
codecs:h264:priority	5.000000
codecs:h264_hi:priority	5
codecs:h264_lo:priority	6
codecs:ilbc:priority	3
codecs:l16_wb:priority	11.000000
codecs:speex:priority	7.000000
codecs:speex_fec:priority	8.000000
codecs:speex_wb:priority	2.000000
codecs:speex_wb_fec:priority	4.000000
codecs:tdvc:priority	11.0


15. Наберите в поле **Filter rinstance** и нажмите Enter, дважды щелкните мышью на первой строке в сетке и поменяйте значение на **sip.cartel.md:0** и нажмите **OK**

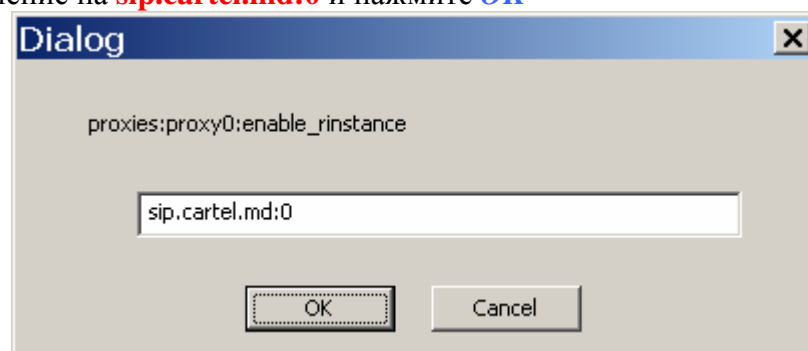

Результат:

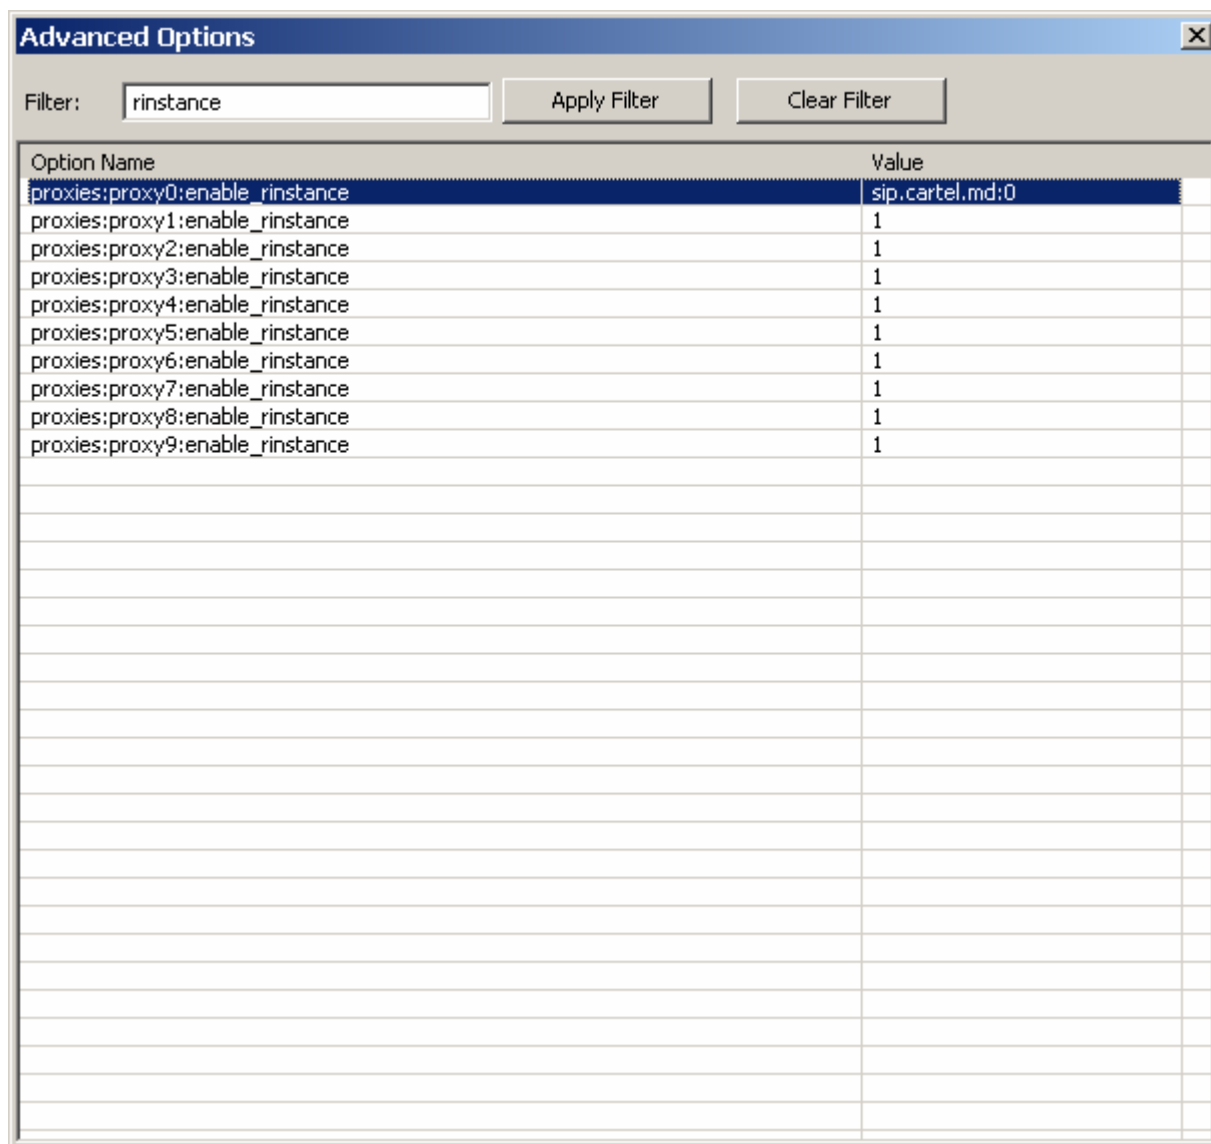

16. Закройте окно *Advances options*, нажав на *x*, нажмите *Yes* чтобы сохранить параметры

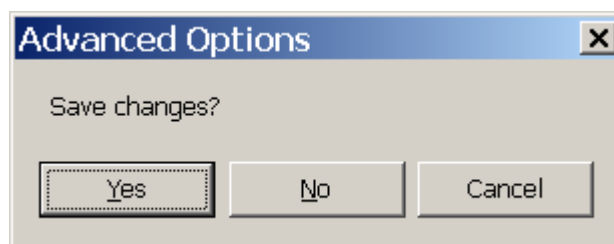

Теперь вы можете пользоваться программой.